

FORM PTO-1390 (REV. 12-2001)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE		ATTORNEY'S DOCKET NUMBER	
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371				20-704	
				U.S. APPLICATION NO. (if known, see 37 CFR 1.5)	
PCT/JP00/05437		August 14, 2000		10/031376	
INTERNATIONAL APPLICATION NO.		INTERNATIONAL FILING DATE		PRIORITY DATE CLAIMED	
PCT/JP00/05437		August 14, 2000		August 26, 1999	
TITLE OF INVENTION					
HEAD-MOUNTED DISPLAY DEVICE					
APPLICANT(S) FOR DO/EO/US					
Yuji OGASAWARA, Etsuyasu KONDO					
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:					
<p>1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.</p> <p>2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.</p> <p>3. <input checked="" type="checkbox"/> This is an express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.</p> <p>4. <input checked="" type="checkbox"/> The US has been elected by the expiration of 19 months from the priority date (Article 31).</p> <p>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))</p> <p>a. <input type="checkbox"/> is attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input checked="" type="checkbox"/> has been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US).</p> <p>6. <input type="checkbox"/> An English language translation of the International Application as filed (35 U.S.C. 371(c)(2)).</p> <p>a. <input type="checkbox"/> is attached hereto.</p> <p>b. <input type="checkbox"/> has been previously submitted under 35 U.S.C. 154(d)(4).</p> <p>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))</p> <p>a. <input type="checkbox"/> are attached hereto (required only if not communicated by the International Bureau).</p> <p>b. <input type="checkbox"/> have been communicated by the International Bureau.</p> <p>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</p> <p>d. <input checked="" type="checkbox"/> have not been made and will not be made.</p> <p>8. <input type="checkbox"/> An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371 (c)(3)).</p> <p>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).</p> <p>10. <input type="checkbox"/> An English language translation of the annexes of the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</p>					
Items 11 to 20 below concern document(s) or information included:					
<p>11. <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98.</p> <p>12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.</p> <p>13. <input type="checkbox"/> A FIRST preliminary amendment.</p> <p>14. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.</p> <p>15. <input type="checkbox"/> A substitute specification.</p> <p>16. <input type="checkbox"/> A change of power of attorney and/or address letter.</p> <p>17. <input type="checkbox"/> A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 - 1.825.</p> <p>18. <input type="checkbox"/> A second copy of the published international application under 35 U.S.C. 154(d)(4).</p> <p>19. <input type="checkbox"/> A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).</p> <p>20. <input type="checkbox"/> Other items or information:</p>					

U.S. APPLICATION NO. (if known) 10/031376		INTERNATIONAL APPLICATION NO. PCT/JP00/05437		ATTORNEY'S DOCKET NUMBER 20-704	
--	--	--	--	---	--

<p>21. <input checked="" type="checkbox"/> The following fees are submitted:</p> <p>BASIC NATIONAL FEE (37 CFR 1.492 (a) (1) - (5)):</p> <p>Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO and International Search Report not prepared by the EPO or JPO..... \$1040.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO \$890.00</p> <p>International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(a)(2)) paid to USPTO \$740.00</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4) \$710.00</p> <p>International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4) \$100.00</p> <p style="text-align: right;">ENTER APPROPRIATE BASIC FEE AMOUNT =</p>				<p>CALCULATIONS PTO USE ONLY</p>	
				\$	890.00
<p>Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).</p>				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE	\$	
Total claims	16 - 20 =	0	x \$18.00	\$	0.00
Independent claims	7 - 3 =	4	x \$84.00	\$	336.00
MULTIPLE DEPENDENT CLAIM(S) (if applicable)				+ \$280.00	\$
TOTAL OF ABOVE CALCULATIONS =				\$	1226.00
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
SUBTOTAL =				\$	1226.00
<p>Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).</p>				\$	
TOTAL NATIONAL FEE =				\$	1226.00
<p>Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property +</p>				\$	
TOTAL FEES ENCLOSED =				\$	1226.00
				Amount to be refunded:	\$
				charged:	\$


a. ☒ A check in the amount of \$ 1226.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.* A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 50-0687. A duplicate copy of this sheet is enclosed.
(under No. 20-704)

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137 (a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO: William H. Bollman, Esq. Manelli Denison & Selter PLLC 2000 M Street, NW Suite 700 Washington, DC 20036-3307 Telephone: 202-261-1020 Facsimile: 202-887-0336	Date: Jan 18, 2002 <div style="text-align: center;">  _____ SIGNATURE </div> <div style="text-align: center;"> <u>William H. Bollman</u> _____ NAME </div> <div style="text-align: center;"> <u>36,457</u> _____ REGISTRATION NUMBER </div>
--	--

13/ppts

- 1 -

DESCRIPTION

HEAD-MOUNTED DISPLAY DEVICE

Technical Field

The present invention relates to a head-mounted display device including an optical system that projects an image, which is produced by a built-in image display means, on the observer's retinas.

Background Art

Various types of head-mounted image display devices have been proposed as compact display devices that are worn on the head and display an image directly viewable with the eyes.

For example, Japanese Patent Unexamined Publication No. 10(1998)-293544 has disclosed a head-mounted image display device that consists mainly of a display casing, right and left supporting frames, a nose rest member, head pressing members, and ear rest members. The display casing accommodates LCDs and others. The right and left supporting frames are borne by joint members, which are detachably attached to the display casing, so that the right and left supporting frames can pivot on the joint members. The nose rest member is fixed to the display casing. The head

pressing members are attached to the supporting frames so that they can slide. The ear rest members are attached to the head pressing members so that they can move together with the head pressing members. The operability of the head-mounted image display device for activating various kinds of features has improved.

However, although the head-mounted image display device disclosed in the Japanese Patent Unexamined Publication No. 10(1998)-293544 has its operability improved, there is room for improvement in the structures of the joint members and supporting frames, which are the components of the display device, in terms of their strength and cost. Moreover, there is room for improvement in attaching condition of earphones from the viewpoint of ease of use.

The present invention attempts to overcome the foregoing drawbacks. An object of the present invention is to provide a head-mounted image display device that has components whose structure is simple, whose strength is sufficient, whose capability is satisfactory, and whose cost can be lowered.

Disclosure of Invention

According to one aspect of the present invention, there is provided a head-mounted image display device having an image producing unit. The image producing unit includes an

image display means and a projecting optical system that projects an image, which is produced by the image display means, on the observer's eyes. The head-mounted image display device further includes a casing, a pair of frame supporting members, and a pair of frame members. The casing accommodates the image producing unit. The pair of frame supporting members is fixed to the casing. The pair of frame members is worn on the head and supported by the frame supporting members so that the frame members can freely pivot on the frame supporting members. When the casing is worn on the head using the frame members, an image produced by the image producing unit is projected on the observer's eyes. The respective pair to the frame supporting members has the same shape.

According to another aspect of the present invention, there is provided a head-mounted image display device having an image producing unit. The image producing unit includes an image display means and a projecting optical system that projects an image, which is produced by the image display means, on the observer's eyes. The head-mounted image display device includes a casing, a pair of frame supporting members, and a pair of frame members. The casing accommodates the image producing unit. The pair of frame supporting members is fixed to the casing. The pair of frame members is worn on the head and supported by the frame

supporting members so that the frame members can freely pivot on the frame supporting members. When the casing is worn on the head using the frame members, an image produced by the image producing unit is projected on the observer's eyes. The each frame member has ribs formed on the surface thereof which faces outside with the head-mounted image display device worn on the head. The ribs are extended over an effective range in the longitudinal direction of each frame member. The ribs on each frame member are a plurality of ribs formed in the width direction. A groove defined with the inner surfaces of the ribs on each frame member serves as a passage groove through which an earphone cord is passed.

According to still another aspect of the present invention, there is provided a head-mounted image display device having an image producing unit. The image producing unit includes an image display means and a projecting optical system that projects an image, which is produced by the image display means, on the observer's eyes. The head-mounted image display device includes a casing body, a pair of frame supporting members, and a pair of frame members. The casing accommodates the image producing unit. The pair of frame supporting members is fixed to the casing body. The pair of frame members is worn on the head and supported by the pair of frame supporting members so that the frame

members can pivot on the frame supporting members. When the casing body is worn on the head using the frame members, an image produced by the image producing unit can be projected on the observer's eyes. The each frame member has facing pins formed on the inner surfaces of flanges constituting the proximal portion of each frame member that acts as a fulcrum. The each frame supporting member has pin supporting hole, into which the pin is fitted, bored therein.

Brief Description of the Drawings

Fig. 1 is a perspective view showing the appearance of a head-mounted image display device HMD in accordance with an embodiment of the present invention;

Fig. 2 is a perspective view showing the head-mounted image display device HMD in accordance with the embodiment mounted on the head;

Fig. 3 is an exploded perspective view showing the major components of the head-mounted image display device HMD in accordance with the embodiment;

Fig. 4 is a perspective view showing a frame support included in the head-mounted image display device HMD in accordance with the embodiment;

Fig. 5 is a plan view showing the frame support included in the head-mounted image display device HMD in accordance with the embodiment;

Fig. 6 is an A-A sectional view of the frame support shown in Fig. 5;

Fig. 7 is a B-B sectional view of the frame support shown in Fig. 6;

Fig. 8 is a partial perspective view showing the proximal portion of a left frame included in the head-mounted image display device HMD in accordance with the embodiment which acts as a fulcrum;

Fig. 9 is a plan view showing the distal portion of the left frame included in the head-mounted image display device HMD in accordance with the embodiment (which has an earphone holder);

Fig. 10 is a C-C sectional view of the left frame shown in Fig. 9;

Fig. 11 is a D-D sectional view of the left frame shown in Fig. 9;

Fig. 12A is a plan view showing the left frame of the head-mounted image display device HMD in accordance with the embodiment, wherein the left frame is attached to a left frame support so that the left frame can pivot, and turned in a direction R1 (a direction of opening);

Fig. 12B is a plan view showing the left frame of the head-mounted image display device HMD in accordance with the embodiment, wherein the left frame is attached to the left frame support so that the left frame can pivot, turned in a

direction R2 (a direction of closing), and thus folded;

Fig. 13A is a plan view showing the left frame of the head-mounted image display device HMD in accordance with the embodiment, wherein a pivot/open angle by which the left frame pivots to open is adjusted to be larger;

Fig. 13B is a plan view showing the left frame of the head-mounted image display device HMD in accordance with the embodiment, wherein the pivot/open angle by which the left frame pivots to open is adjusted to be smaller;

Fig. 14 is a side view showing the head-mounted image display device HMD in accordance with the embodiment which is worn on the head and seen from left;

Fig. 15 is a side view showing the head-mounted image display device HMD in accordance with the embodiment which is worn on the head and seen from right;

Fig. 16 shows the head-mounted image display device HMD in accordance with the embodiment whose right and left frames are folded in order to carry or store the head-mounted image display device HMD, and which is seen from the side of image producing windows; and

Fig. 17 is a side view showing the head-mounted image display device HMD in accordance with the embodiment whose right and left frames are replaced with each other in order to produce a custom-made head-mounted image display device HMD.

Best Mode for Carrying Out the Invention

An embodiment of the present invention will be described in conjunction with the drawings below.

Fig. 1 is a perspective view showing the appearance of a head-mounted image display device HMD in accordance with an embodiment of the present invention. Fig. 2 is a perspective view showing the head-mounted image display device (HMD) worn on the head. Fig. 3 is an exploded perspective view showing the major components of the head-mounted image display device HMD.

An HMD 1 in accordance with the embodiment of the present invention consists mainly of an image producing unit 2, right and left frames 4 and 5, and a controller 8. The image producing unit 2 has LCDs, which serves as an image display means, enclosed in covers 11 and 22. The right and left frame units 4 and 5 are borne by the cover 11 so that they can pivot, and used to wear the HMD on the head. The controller 8 is connected to the image producing unit over a cable 9 over which a control signal and an image signal are transmitted.

Hereinafter, a description will proceed on the assumption that a leftward direction is the left side relative to an observer who sees the front and rear covers 22 and 11 of the image producing unit 2, and that a

rightward direction is the right side relative to the observer. Moreover, a line linking fulcrums on which right and left frames 25 and 26 that will be described later pivot, that is, a line linking the centers of frame supports 16 and 17 that will be described later shall be axis X0. An axis that extends vertically while being orthogonal to the axis X0 shall be axis Y0. An axis that extends back and forth while being orthogonal to the axis X0 shall be axis Z0. Moreover, a direction parallel to the axis X0 shall be a direction X. A direction parallel to the axis Y0 shall be a direction Y. A direction parallel to the axis Z0 shall be a direction Z. When an upper point in the direction Y tilts forward and a lower point therein tilts backward, an inclination shall be $+ \theta$. When the upper point in the direction Y tilts backward and the lower point therein tilts forward, the inclination shall be $- \theta$.

When the HMD 1 is used to view an image, the HMD 1 is worn on the observer's head 101 with a nose rest 3 mounted on the nose 102 and with right and left frame units 5 and 4 hung on the ears 103. The nose rest 3 is formed as part of the cover of the image producing unit 2. In this state, right and left image producing windows 11d and 11e of the image producing unit 2 are located in front of the observer's eyes. The observer mounts an image and sound recording memory card on a card mount 8a of the controller 8.

A video signal read from the memory card is transferred from the controller 8. Consequently, an image is displayed on the LCDs. The light carrying the display image is converged on the observer's eyes through the image producing windows 11d and 11e. Consequently, the image is viewed. Moreover, sounds are heard with right and left earphones 7 and 6 detached from the right and left frame units 5 and 4 and inserted into the ears 103.

The structures of the components of the HMD 1 will be described below.

The image producing unit 2 consists mainly of the front and rear covers 22 and 11, an image producing block 10, right and left frame supports 17 and 16, right and left earphone cords 21 and 20, and a signal cable 9. The front and rear covers 22 and 11 are casing members. The image producing block 10 is borne by the rear cover 11. The right and left frame supports 17 and 16 that are paired frame supporting members are also borne by the rear cover 11. The right and left earphone cords 21 and 20 are routed to the image producing block 10. The signal cable 9 is routed to the image producing block 10 through a connector and held in a bushing 19.

The earphones 6 and 7 are of a headphone-embedded type. The earphone cord 20 is passed through a passage groove 25h formed in the left frame 25 that will be described later. A

portion of the earphone cord 20 coming out of an adjuster 26, which will be described later, includes a stretchable and contractile coil spring portion (curled portion) 20a (see Fig. 1). Likewise, the right earphone cord 21 is passed through a passage groove 27h formed in the right frame 27. A portion of the right earphone cord 21 coming out of an adjuster 28, which will be described later, includes a similar stretchable and contractile coil spring portion (curled portion).

The right or left frame unit 5 or 4 consists mainly of a right or left frame 27 or 25 and the adjuster 28 or 26. The right and left frames 27 and 25 are a pair of frame members supported by the right and left frame supports 17 and 16 so that the frame members can pivot freely. The adjusters 28 and 26 are a pair of adjusters attached to the frames so that the adjusters can slide freely. The adjusters 28 and 26 are magnitude-of-frame pivot changing devices.

The image producing block 10 is fixed to and borne by the rear cover 11. The image producing block 10 includes right and left LED surface light sources 12b and 12a, right and left LCDs 13b and 13a, right and left prisms 14b and 14a, and a circuit board 15. The right and left LCDs 13b and 13a serve as an image display means and are located below the surface light sources. The right and left prisms 14b and

14a are located below the LCDs. An IC serving as a LCD drive circuit for driving the LCDs 13b and 13a and an IC serving as an audio circuit are mounted on the circuit board 15.

In the image producing block 10, light rays carrying images transmitted by the LCDs 13b and 13a are reflected from the prisms 14b and 14a, and projected on the observer's eyes through the image producing windows 11e and 11d.

The earphone cords 21 and 20 are routed within the rear cover 11 as mentioned below. Specifically, the earphone cord 21 or 20 is passed through a gap between bosses 11b or 11a to which the frame support 17 or 16 is screwed and which are formed on the wall of the rear cover 11. After the earphone cord 21 or 20 is knotted, the earphone cord 21 or 20 is passed behind the LED surface light source 12b or 12a and then soldered directly to the circuit board 15.

The right and left frame supports 17 and 16 are formed using the same member, and attached to the right and left ends of the rear cover 11. When attached, the right and left frame supports 17 and 16 are faced.

Fig. 4 is a perspective view of the frame support 16. Fig. 5 is a plan view of the frame support 16. Fig. 6 is an A-A sectional view of the frame support 16 shown in Fig. 5, and Fig. 7 is a B-B sectional view thereof.

The frame support 16 has attachment holes 16a, concave

parts 16b and 16h, inner walls 16c and 16i, and frame supporting holes 16d and 16j. The attachment holes 16a are joined to the bosses 11a formed on the rear cover 11 using screws. The concave parts 16b and 16h are formed in the upper and lower surfaces respectively. The inner walls 16c and 16i are the walls of the concave parts and contacts frame flanges. The frame supporting holes 16d and 16j are bored in the concave parts. Pins formed on the frame 25 and 27, which will be described later, are fitted into the frame supporting holes 16. An axis Y1 linking the frame supporting holes 16d and 16j is inclined by an angle θ_1 (approximately $+ 8^\circ$) relative to the direction Y. The angle θ_1 corresponds to an inclination by which the plane on which the left and right frame supported by the frame support 16 pivots is inclined.

Moreover, a peripheral convex part 16e for preventing the left frame from coming off is formed on the perimeter of the frame supporting hole 16d in the concave part 16b of the upper surface. Furthermore, a concave part 16f is formed as an L-shaped groove for assisting in insertion or removal of one of the pins formed on the left frame. A step 16g is formed one step below the concave part 16f.

On the other hand, the same peripheral convex part is formed on the perimeter of the frame supporting hole 16j bored in the concave part 16h in the lower (back) surface of

the frame support 16. Furthermore, a concave part serving as an L-shaped groove for assisting in insertion or removal of the other pin formed on the left frame, and a step 16k are also formed.

On the other hand, the right frame support 17 is, as mentioned above, realized with the same shaped member as the left frame support 16. The right frame support 17 is fixed to the right bosses 11b formed on the rear cover 11 in a vertically reversed state relative to the left frame support 16. An axis Y2 linking frame supporting holes 17d and 17j bored in the right frame support 17 is inclined by a tilt angle of $- \theta 1$ (approximately $- 8^\circ$).

The appearance of the left frame 25 is shown in Fig. 3 that is the perspective view and in Fig. 14 that is a side view of the left frame 25 with the HMD 1 worn on the head and seen from left. Part of the left frame 25 is shown in detail in Fig. 8, Fig. 9, Fig. 10, and Fig. 11. Fig. 8 is a perspective view showing the proximal portion of the left frame that acts as a fulcrum. Fig. 9 is a plan view showing the distal portion of the left frame. Fig. 10 is a C-C sectional view of the distal portion shown in Fig. 9. Fig. 11 is a D-D sectional view of the distal portion shown in Fig. 9.

The shape of the right frame 27 that will be described later is symmetric to the shape of the left frame 25. The

appearance of the right frame 27 is shown in Fig. 15 that is a side view of the right frame 23 with the HMD 1 worn on the head and seen from right.

The left frame 25 has, as shown in Fig. 8, two ribs 25a of upper and lower ribs formed on the outer surface thereof, which faces outside with the HMD worn on the head, over substantially the whole range in the longitudinal direction. The upper and lower ribs 25a are formed in order to reinforce the frame. A groove 25h defined by the ribs 25a has the middle portion thereof covered with the adjuster 26 that will be described later. The groove 25h is, as shown in Fig. 11, used as a passage groove through which the earphone cord 20 is passed.

On the other hand, the right frame 27 has two ribs of upper and lower ribs 27a formed on the outer surface thereof, which faces outside with the HMD worn on the head, along substantially the whole range in the longitudinal direction. The upper and lower ribs 27a are formed in order to reinforce the right frame. A groove 27h sandwiched by the ribs 27a has the middle portion thereof covered with the adjuster 28 that will be described later. The groove 27h is used as a passage groove through which the earphone cord 21 is passed.

In the left frame 25, pins 25b and 25c are formed on the inner surfaces of flanges 25i and 25j that constitute

the proximal portion of the left frame which act as a fulcrum. The pins 25b and 25c are facing and fitted into the frame supporting holes 16d and 16j. An axis Y1 linking the pins 25b and 25c is inclined by an angle of $+ \theta_1$ relative to the direction Y. The direction Y is orthogonal to a major axis plane (a plane containing a center line, which passes the center of the width of the left frame) defined in the proximal portion of the left frame that acts as a fulcrum.

Moreover, the distal portion of the left frame 25 that has an opening 25d and acts as an earphone holder is shifted down by a dimension S with respect to the major axis plane P1. The major axis plane P1 is defined in the proximal portion thereof that has the pins 25b and 25c and acts as a fulcrum.

On the other hand, the right frame 27 has, as shown in Fig. 3, pins 27b and 27c formed on the inner surfaces of flanges 27i and 27j that constitute the proximal portion of the right frame 27 which acts as a fulcrum. The pins 27b and 27c are facing and fitted into the frame supporting holes 17d and 17j of the frame support 17 so that the right frame 27 can pivot freely. An axis Y2 linking the pins 27b and 27c is inclined by an angle $- \theta$ relative to the direction Y. The direction Y is orthogonal to a major axis plane P2 ((a plane containing a center line that passes the

center of the width of the right frame) (see Fig. 15)) defined in the proximal portion of the right frame 27 that acts as a fulcrum.

Furthermore, the distal portion of the right frame 27 that has an opening 27d and acts as an earphone holder, as shown in Fig. 15, is shifted down by a dimension S with respect to the major axis plane P2. The major axis plane P2 is defined in the proximal portion thereof that acts as a fulcrum and that has the pins 26b and 26c. When the HMD 1 is worn on the head as shown in Fig. 14 and Fig. 15, the direction Y and the direction Z shall be substantially consistent with a vertical direction and a horizontal direction respectively.

The left frame 25 has, as shown in Fig. 3 and Fig. 8, three projections 25g formed near the proximal portion thereof that acts as a fulcrum. The adjuster 26 is mounted on the portion of the left frame having the three projections so that the adjuster 26 can slide. Claws 26a of the adjuster 26 are fitted in gaps among the projections 25g, whereby the adjuster 26 is positioned.

On the other hand, the right frame 27 has, as shown in Fig. 3, three projections 27g formed near the proximal portion thereof that acts as a fulcrum. The adjuster 28 is mounted on the portion of the right frame 27 having the projections 27g so that the adjuster 28 can slide. Claws

28a of the adjuster 28 are fitted in gaps among the projections 27g, whereby the adjuster 28 is positioned.

The adjuster 26 is symmetric in the width direction thereof in which the claws 26a as well as distal projections 26b are formed. The distal projections 26b are used to change a magnitude of pivot/open and shaped like prongs of a fork. The adjuster 28 has the same shape as the adjuster 26. Similarly to the adjuster 26, the adjuster 28 has distal projections 28b, which are used to change a magnitude of pivot/open and shaped like prongs of a fork, as well as the claws 28a.

Furthermore, the distal portion of the left frame 25 has, as shown in Fig. 9 and Fig. 10, the opening 25d and two claws 25e and 25f that are facing, and thus acts as an earphone holder. The earphone holder is symmetric in the width direction thereof.

When the HMD 1 is carried by a user, the earphone 6 is held in the earphone holder. In this case, the earphone 6 is first engaged with either of the claws 25e and 25f facing each other, and then fitted in the opening 25d so that the earphone will be clamped by the claws 25e and 25f.

Referring to Fig. 9, the earphone 6 may be slid below the claws 25e and 25f from above or below in the width direction and then held in the stowage.

On the other hand, the proximal portion of the right

frame 27 has, as shown in Fig. 3, the opening 27d and claws 27e and 27f that are facing, and thus acts as a laterally-symmetric earphone holder. The procedure of putting the earphone 7 in the earphone holder is the same as the procedure of putting the earphone 6 in the earphone holder formed in the left frame 25.

Next, the procedure of attaching or detaching the left frame 25 to or from the frame support 16 will be described below. Fig. 12A and Fig. 12B are plan views showing the left frame 25 attached to the left frame support 16. Fig. 12A shows a use state (for viewing) in which the left frame 25 is turned in a direction R1 (a direction of opening). Fig. 12B shows a folded state (a portable or storable state) in which the left frame 25 is turned in a direction R2 (a direction of closing).

In the state shown in Fig. 12A or Fig. 12B, the upper and lower pins 25b and 25c of the left frame 25 are fitted into the frame supporting holes 16d and 16j. In the state shown in Fig. 12A, the flanges 25i and 25j of the left frame 25 contacts the inner walls 16c of the frame support 16. The left frame 25 does not therefore move inwards (towards the center of the rear cover 11). Consequently, the upper and lower pins 25b and 25c will not come off from the frame supporting holes 16d and 16j.

In the state shown in Fig. 12B, there is a gap between

the flanges 25i and 25j of the left frame 25 and the inner walls 16c of the frame support 16. Therefore, the left frame 25 can move inwards (towards the center of the rear cover 11). Consequently, while the flanges 25i and 25j of the left frame 25 are deformed elastically in the thickness direction thereof, the upper and lower pins 25b and 25c can be removed from the frame supporting holes 16d and 16j in order to disassemble the left frame and image producing unit. Otherwise, the upper and lower pins 25b and 25c can be inserted into the frame supporting holes 16d and 16j in order to assemble the left frame and image producing unit.

During the assembling, when the pins 25b and 25c of the left frame 25 are fitted into the frame supporting holes 16d and 16j, the pins 25b and 25c are first temporarily engaged with the narrow steps 16g and 16k of the frame support 16 from a direction D1. Thereafter, the space between the pins 25b and 25c is widened, and passed through the concave parts 16f of the frame support that are the L-shaped grooves assisting in insertion or removal of the pins. Finally, the pins 25b and 25c are fitted into the frame supporting holes 16d and 16j.

As mentioned above, the frame supporting holes 16d and 16j are inclined by an angle θ_1 . Therefore, when the left frame 25 is attached to the frame support 16, the axis Y1 linking the pins 25b and 25c of the left frame 25 is also

inclined by the angle $+ \theta_1$ as shown in Fig. 14.

Consequently, when the HMD 1 is worn on the head, the major axis plane P1 defined in the proximal portion of the left frame 25 that acts as a fulcrum is kept horizontal and aligned with the direction Z.

On the other hand, the procedure of attaching or detaching the right frame 27 to or from the frame support 17 is the same as the procedure of attaching or detaching the left frame 25. However, as mentioned above, the frame supporting holes 17d and 17j are inclined by an angle $- \theta_1$. Therefore, when the frame 27 is attached to the frame support 17, the axis Y2 linking the pins 27b and 27c of the frame 27 is inclined by the angle $- \theta_1$ as shown in Fig. 15. Consequently, when the HMD 1 is worn on the head, the major axis plane P2 defined in the proximal portion of the right frame that acts as a fulcrum is kept horizontal and aligned with the direction Z.

The distal portion of the right or left frame 27 or 25 that acts as the earphone holder is shifted down by the dimension S with respect to the proximal portion thereof that acts as a fulcrum. Therefore, when the HMD 1 is worn on the observer's head 101, the image producing windows 11d formed in the cover of the HMD 1 are disposed opposite the observer's eyes with the portions near the distal portions of the right and left frames placed on the ears 103. An

image can therefore be viewed optimally.

With the HMD 1 worn on the head, the right and left frames 27 and 25 are pushed outwards by the head and deformed elastically. Compressing force with which the frames compress the head can be adjusted by changing a magnitude (angle) of pivot, by which the right or left frame pivots in the direction of spreading (direction R1) using the adjuster 28 or 26.

The procedure of adjusting the magnitude of pivot (spreading) by which the right or left frame 27 or 25 pivots to spread is the same between the right and left frames 27 and 25. The procedure of adjusting the magnitude of pivot by which the left frame 25 pivots will therefore be described below.

Fig. 13A and Fig. 13B are plan views showing adjustment of an angle by which the left frame can pivot. Referring to Fig. 13A, the adjuster 26 has the claws 26a fitted into a gap between an outer pair of projections 25g formed on the left frame 25. The flanges 25i and 25j of the left frame 25 can contact directly the inner walls 16c of the frame support 16. The left frame 25 can be widely spread in the direction R1.

In contrast, referring to Fig. 13B, the adjuster 26 is slid towards the proximal portion of the frame that acts as a fulcrum. The claws 26a are fitted into a gap between an

inner pair of projections 25g of the left frame 25. In this state, each of the distal projections 26b of the adjuster 26 intervenes between the inner wall 16c of the frame support 16 and the flange 25i or 25j of the left frame 25. The left frame 25 can be spread in the direction R1 by a smaller angle.

The aforesaid adjustment of a spreading angle is performed on the right frame 27 too. Thus, the manner in which the right and left frames 27 and 25 are worn on the head 101, that is, force by which the right and left frames 27 and 25 compress the head 101 can be adjusted.

According to the present embodiment, the number of projections 27g or 25g of the right or left frame 27 or 25 over which the adjuster 28 or 26 is mounted is three. The adjusters 28 and 26 can therefore be slid to either of two positions. The present invention is not limited to this mode. Alternatively, a click that locks the adjuster at two or more specified positions may be formed in the frames or adjusters. In this case, a spreading angle can be adjusted finely. Moreover, the adjusters 28 and 26 may not be locked at any specified positions but may be slid to any position. In this case, the spreading angle can be adjusted to any desired value but need not be set to any of specified values. However, in this case, the distal projections 28b and 26b of the adjusters 28 and 26 must be tapered or the inner walls

of the frame supports 17 and 16 must be continuously inclined.

When the HMD 1 of the present embodiment having the aforesaid components is used to view an image, first, the HMD 1 is, as shown in Fig. 2, worn on the head 101 with the right and left arms 27 and 25 turned in the direction of spreading. At this time, the nose rest 3 is placed on the nose 102. In this state, the image producing windows 11e and 11d of the image producing unit 2 are located in front of the observer's eyes. The earphones 7 and 6 are taken out of the earphone holders and inserted into the ears 103.

With the HMD 1 worn on the head, light representing an image produced according to a video signal sent from the controller 8 is projected on the observer's eyes by way of the prisms 14b and 14a and image producing windows 11e and 11d. Consequently, an image is viewed. Moreover, sounds generated according to an audio signal are heard through the earphones 7 and 6.

Moreover, when the HMD 1 is carried or stowed, the earphones 7 and 6 are stowed in the earphone holders so that the earphone cords will not sag. The right and left frames 27 and 25 are folded so that the HMD 1 can be carried or stowed readily.

Fig. 16 shows the HMD 1 in a portable or storable state, wherein the HMD 1 is seen from behind. The right and left

frames 27 and 25 are folded inwards. The axis Y1 linking the pins 25b and 15c of the left frame 25 is inclined back and forth by an angle $+ \theta_1$, and the axis linking the pins 27b and 27c of the right frame 27 is inclined back and forth by an angle $- \theta_1$. Therefore, when the frames are folded as shown in Fig. 16, the right and left frames 27 and 25 will not interfere with each other.

The HMD 1 may be worn on a user who has a big nose or a different skull. In this case, if the HMD 1 is used as it is, the nose rest 3 moves obliquely forwards. The distal portions (that are near the earphone holders) of the right and left frames 27 and 25 are therefore located in the middles of the ears. The user wearing the HMD would feel uncomfortable.

According to the present embodiment, the right and left frames 27 and 25 of the HMD 1 are detached temporarily, replaced with each other, and then attached to the frame supports 17 and 16. This results in a custom-made HMD. Using this custom-made HMD, even a user who has a big nose can enjoy an image viewing optimally.

Fig. 17 is a side view showing a custom-made HMD worn on the head 111 of an observer who has a big nose, wherein the HMD is seen from left. In the worn state shown in Fig. 17, compared with the worn state shown in Fig. 14, the nose rest 3 is lifted because of the big nose 112. Therefore,

the direction Y and direction Z (consistent with the direction of the major axis plane P2) defined on the custom-made HMD are deflected from the vertical direction V and horizontal direction H respectively by an angle - θ_0 . Moreover, since the right and left frames are replaced with each other, the axis Y3 linking the pins 27b and 27c of the right frame 27 attached to the left frame support is inclined by another angle of - θ_1 .

The distal portion of the right frame 27 attached to the left frame support 16 is, unlike the one shown in Fig. 14, shifted up by the dimension S. The distal portion will therefore not be located in the middle of the ear but will be placed at the upper normal position on the ear 113. The left frame 25 is attached to the right frame support 17 in the same manner, and therefore placed at the upper normal position on the ear 113. Consequently, as long as the custom-made HMD having the frames replaced with each other is employed, even an observer having a big nose can view an image normally.

The HMD 1 of the present embodiment has advantages described below.

(1) A common member can be used as the frame supports 17 and 16 that support the right and left frames so that the right and left frames can pivot. This results in the reduced cost of parts and the simplified management of parts.

(2) The pin supporting holes for supporting the pins formed on the frames so that the right and left frames can pivot are inclined. Therefore, when the right and left frames 27 and 25 are folded in order to carry the HMD, the right and left frames will not interfere with each other. This is helpful in carrying or storing the HMD.

(3) The right and left frames 27 and 25 have the upper and lower ribs 27a and 25a for reinforcement formed on the outer surfaces thereof that are the other side of surfaces facing the head with the HMD worn on the head. With the HMD worn on the head, compressive stress works on the tips of the ribs. Therefore, a crack derived from tensile stress will not occur. This is advantageous in terms of strength. Furthermore, the ribs 27a or 25a can be formed over substantially the whole length of each frame. The formation of the ribs is therefore markedly effective in reinforcing the frame.

(4) The ribs 27a and 25a on the right and left frames 27 and 25 are formed on the outer surfaces of the frames. The ribs will therefore not come into contact with the head. A user wearing the HMD would therefore feel comfortable.

(5) The groove sandwiched by the upper and lower ribs 27a or 25a of the right or left frame 27 or 25 and having a portion thereof covered with the adjuster 28 or 26 is utilized as the cord passage groove 27h or 25h that guides

the earphone cord 21 or 20. Consequently, the earphone cords 21 and 20 will not bother a user who wears or carries the HMD. The user will find the HMD 1 user-friendly.

(6) With the right and left frames 27 and 25 folded, without using any tool, the frames can be attached to or detached from the frame supports through the L-shaped grooves that assist in attachment and detachment and that are formed in the supports. This results in easy assembling and repair.

(7) When the right and left frames 27 and 25 are replaced with each other, the HMD can be provided as a custom-made HMD in which the positions of the frames relative to the position of the nose are changed.

(8) Furthermore, when the custom-made HMD is realized, the right and left frames can be detached and attached without the necessity of any tool. The specifications for the HMD can therefore be modified easily.

(9) A spreading angle by which the right or left frame 27 or 25 is spread can be adjusted readily by merely sliding the adjuster 28 or 26. Thus, the HMD would be found user-friendly.

(10) The adjusters 28 and 26 are realized with the same member. This contributes to a reduction in the cost of parts.

(11) The earphones 7 and 6 can be readily held in the

earphone holders in the right and left frames 27 and 25 by clamping each earphone with two claws or sliding each earphone vertically. The HMD can therefore be readily brought into a portable or storable state.

(12) The earphones 7 and 6 may be held in the earphone holders in the frames by clamping each earphone with two claws. In this case, even if slightly aggressive force works on the earphone holders, since the earphone holders deform readily, the earphone holders will not be damaged. The claws come into contact with the outer cover of each earphone. The loudspeaker covers of the earphones will therefore not be damaged.

(13) The earphone cord 21 or 20 utilizes as a cord guide groove the groove sandwiched by the ribs 27a or 25a of the right or left frame 27 or 25 which includes the portion of the groove covered with the adjuster 28 or 26. The earphone cords are therefore reliably held but not sag while the HMD is carried or stored. While the HMD is used for viewing, the earphone cords will not sag very much. The earphone cords sag at proper positions near the ears. Thus, the HMD would be found user-friendly.

(14) The neatness in settlement of the earphone cords 21 and 20 in the frames has improved owing to the coil spring portions thereof. The coil spring portions can prevent the earphone cords from floating above the cord

passage grooves 27h and 25h.

(15) If the HMD 1 is taken off from the head with the earphones 7 and 6 left inserted in the ears, the coil spring portions of the earphone cords 21 and 20 stretch. The conductors of the cords can be prevented from being disconnected. Moreover, a user will not have a pain in the ears.

As mentioned above, according to the present invention, there is provided a head-mounted image display device (HMD) that is compact and easily worn on the head. Right and left components of the HMD can be realized using a common member and formed strong enough. Earphones are easy to use. Thus, the user-friendly and low-cost HMD is provided.

CLAIMS

1. A head-mounted image display device having an image producing unit (2) which includes an image display means (13a and 13b) and a projecting optical system (12a, 12b, 14a, and 14b) for projecting an image, which is produced by said image display means, on the observer's eyes, said head-mounted image display device comprising:

a casing body (11 and 22) in which said image producing unit is incorporated;

a pair of frame supporting members (16 and 17) fixed to said casing body; and

a pair of frame members (25 and 27) that is members useful in wearing the head-mounted image display device on the head, and is supported by said frame supporting members so that the frame members can pivot freely;

wherein said respective pair to the frame supporting members has the same shape.

2. A head-mounted image display device having an image producing unit (2) which includes an image display means (13a and 13b) and a projecting optical system (12a, 12b, 14a, and 14b) for projecting an image, which is produced by said image display means, on the observer's eyes, said head-mounted image display device HMD comprising:

a casing body (11 and 22) in which said image producing unit is incorporated;

a pair of frame supporting members (16 and 17) fixed to said casing body; and

a pair of frame members (25 and 27) that is members useful in wearing said head-mounted image display device HMD on the head, and is supported by said frame supporting members so that the frame members can pivot freely,

wherein said frame member has ribs (27a or 25a) formed on the outer surface thereof which faces outside with said head-mounted image display device worn on the head, said ribs being extended over an effective range in the longitudinal direction of the frame member.

3. The head-mounted image display device HMD according to Claim 2, wherein:

said ribs on each frame member are a plurality of ribs lined in the width direction of the frame member; and

a groove defined with the inner surfaces of said ribs serves as a passage groove for an earphone cord (20 or 21).

4. A head-mounted image display device having an image producing unit (2) which includes an image display means (13a and 13b) and an image projecting optical system (12a, 12b, 14a, and 14b) for projecting an image, which is produced by said image display means, on the observer's eyes, said head-mounted image display device comprising:

a casing body (11 and 22) in which said image producing unit is incorporated;

a pair of frame supporting members (16 and 17) fixed to said casing body; and

a pair of frame members (25 and 27) that is members useful in wearing said head-mounted image display device HMD on the head, and is supported by said pair of frame supporting members so that the frame members can pivot freely,

wherein said frame member has facing pins (25b and 25c or 27b and 27c) formed on the inner surfaces of flanges constituting the proximal portion thereof that acts as a fulcrum; and

said frame supporting member has pin supporting holes (16d and 16j or 17d and 17j), into which said pins are fitted, bored therein.

5. The head-mounted image display device HMD according to Claim 4, wherein an axis (Y1 or Y2) linking said facing pins formed on each frame member is inclined by a predetermined angle relative to a major axis plane defined in the frame member.

6. The head-mounted image display device according to Claim 4, wherein said frame member can be attached to or detached from said frame supporting member by elastically deforming said flanges.

7. The head-mounted image display device according to Claim 6, wherein:

an L-shaped groove (16f or 16g) is formed in one direction along each of said pin supporting holes formed in said frame support member; and

said frame member is moved along said L-shaped grooves and then attached or detached.

8. The head-mounted image display device according to Claim 6, wherein said frame member is attached to or detached from said frame supporting member while being folded substantially into a portable or storable state.

9. A head-mounted image display device having an image producing unit (2) which includes an image display means (13a and 13b) and a projecting optical system (12a, 12b, 14a, and 14b) for projecting an image, which is produced by said image display means, on the observer's eyes, said head-mounted image display device comprising:

a casing body (11 and 22) in which said image producing unit is incorporated;

a pair of frame supporting members (16 and 17) fixed to said casing body;

a pair of frame members (25 and 27) that is members useful in wearing said head-mounted image display device on the head, and is supported by said pair of frame supporting members so that the frame members can pivot freely;

frame spreading magnitude changing devices (26 and 28) each of which is attached to said frame member so that the

device can move relative to said frame member, and is used to adjust an angle of pivot by which the frame member pivots,

wherein said frame spreading magnitude changing devices is moved relative to said frame member so that the device will have distal projections thereof inserted into or withdrawn from gaps between the contacting portions of said frame supporting member and the contacting portions (25i and 25j or 27i and 27j) of said frame member, whereby a pivot angle by which said frame member can pivot is adjusted at least in two steps.

10. A head-mounted image display device having an image producing unit (2) which includes an image display means (13a and 13b) and a projecting optical system (12a, 12b, 14a, and 14b) for projecting an image, which is produced by said image display means, on the observer's eyes, said head-mounted image display device comprising:

a casing body (11 and 22) in which said image producing unit is incorporated;

a pair of frame supporting members (16 and 17) fixed to said casing body;

a pair of frame members (25 and 27) that is members useful in wearing said head-mounted image display device HMD on the head, and is supported by said pair of frame supporting members so that the frame members can pivot freely; and

frame spreading magnitude changing devices (26 and 28) each of which is attached to said frame member so that the device can move relative to said frame member, and is used to adjust a pivot angle by which the frame member can pivot,

wherein said frame spreading magnitude changing devices is moved relative to said frame member so that the device will have distal projections thereof inserted into or withdrawn from gaps between the contacting portions of said frame supporting member and the contacting portions (25i and 25j or 27i and 27j) of said frame member, whereby the pivot angle by which said frame member can pivot is adjusted to be any position that is not a stepwise specified position.

11. The head-mounted image display device HMD according to Claim 9 or 10, wherein said frame spreading magnitude changing devices are realized with a pair of members, and respective said pair to the members is the same shape.

12. The head-mounted image display device HMD according to Claim 9 or 10, wherein:

said frame member has a plurality of ribs (25a or 27a) lined in the width direction on an outer surface thereof that faces outside with said head-mounted image display device worn on the head, and said plurality of ribs are extended over an effective range in the longitudinal direction of the frame member;

said frame spreading magnitude changing device is

attached to cover said ribs; and

a groove defined with said ribs and having a portion thereof covered by the frame spreading magnitude changing device is used as an earphone cord passage groove.

13. A head-mounted image display device having an image producing unit (2) which includes an image display means (13a and 13b) and a projecting optical system (12a, 12b, 14a, and 14b) for projecting an image, which is produced by said image display means, on the observer's eyes, said head-mounted image display device comprising:

a casing body (11 and 22) in which said image producing unit is incorporated;

a pair of frame supporting members (16 and 17) fixed to said casing body; and

a pair of frame members (25 and 27) that is members useful in wearing said head-mounted image display device HMD on the head, and is supported by said frame supporting members so that the frame members can pivot freely,

wherein earphone holders (25d, 25e, and 25f or 27d, 27e, and 27f) are formed in the distal portion of said frame member.

14. The head-mounted image display device HMD according to Claim 13, wherein:

said earphone holder includes an opening, to which the speaker surface of said earphone is faced, and claws that

clamp the body of said earphone, that are faced to each other in the horizontal direction, and that can deform elastically.

15. A head-mounted image display device having an image producing unit (2) which includes an image display means (13a and 13b) and a projecting optical system (12a, 12b, 14a, and 14b) for projecting an image, which is produced by said image display means, on the observer's eyes, said head-mounted image display device comprising:

a casing body (11 and 22) in which said image producing unit is incorporated;

a pair of frame supporting members (16 and 17) fixed to said casing body; and

a pair of frame members (25 and 27) that is members useful in wearing said head-mounted image display device HMD on the head, and is supported by said frame supporting members so that the frame members can pivot freely,

wherein said frame member has a distal portion thereof shifted down by a predetermined dimension with respect to a major axis plane (P1) defined in the proximal portion of said frame member that acts as a fulcrum.

16. The head-mounted image display device HMD according to Claim 15, wherein said paired frame members or said paired frame supporting members can be replaced with each other.

ABSTRACT

A head-mounted image display device consists mainly of an image producing unit (2), right and left frames (27 and 25), and a controller (8). The image producing unit has image display LCDs enclosed with covers (11 and 12). The right and left frames useful in wearing the head-mounted image display device HMD on the head are supported by frame supports (17 and 16) that are fixed to the cover (11). Herein, the right and left frames are detachably attached to the frame supports. An earphone cord (21 or 20) is guided along ribs which are formed on the outer surface of the right or left frame. An earphone (7 or 6) is detachably attached to an earphone holder formed in the distal or rear portion of the right or left frame. Thus, there is provided a head-mounted image display device that is compact, that can be readily worn on the head, and that not only enables viewing of a display screen image but also simplifies observation of an ambient environment.

FIG.1

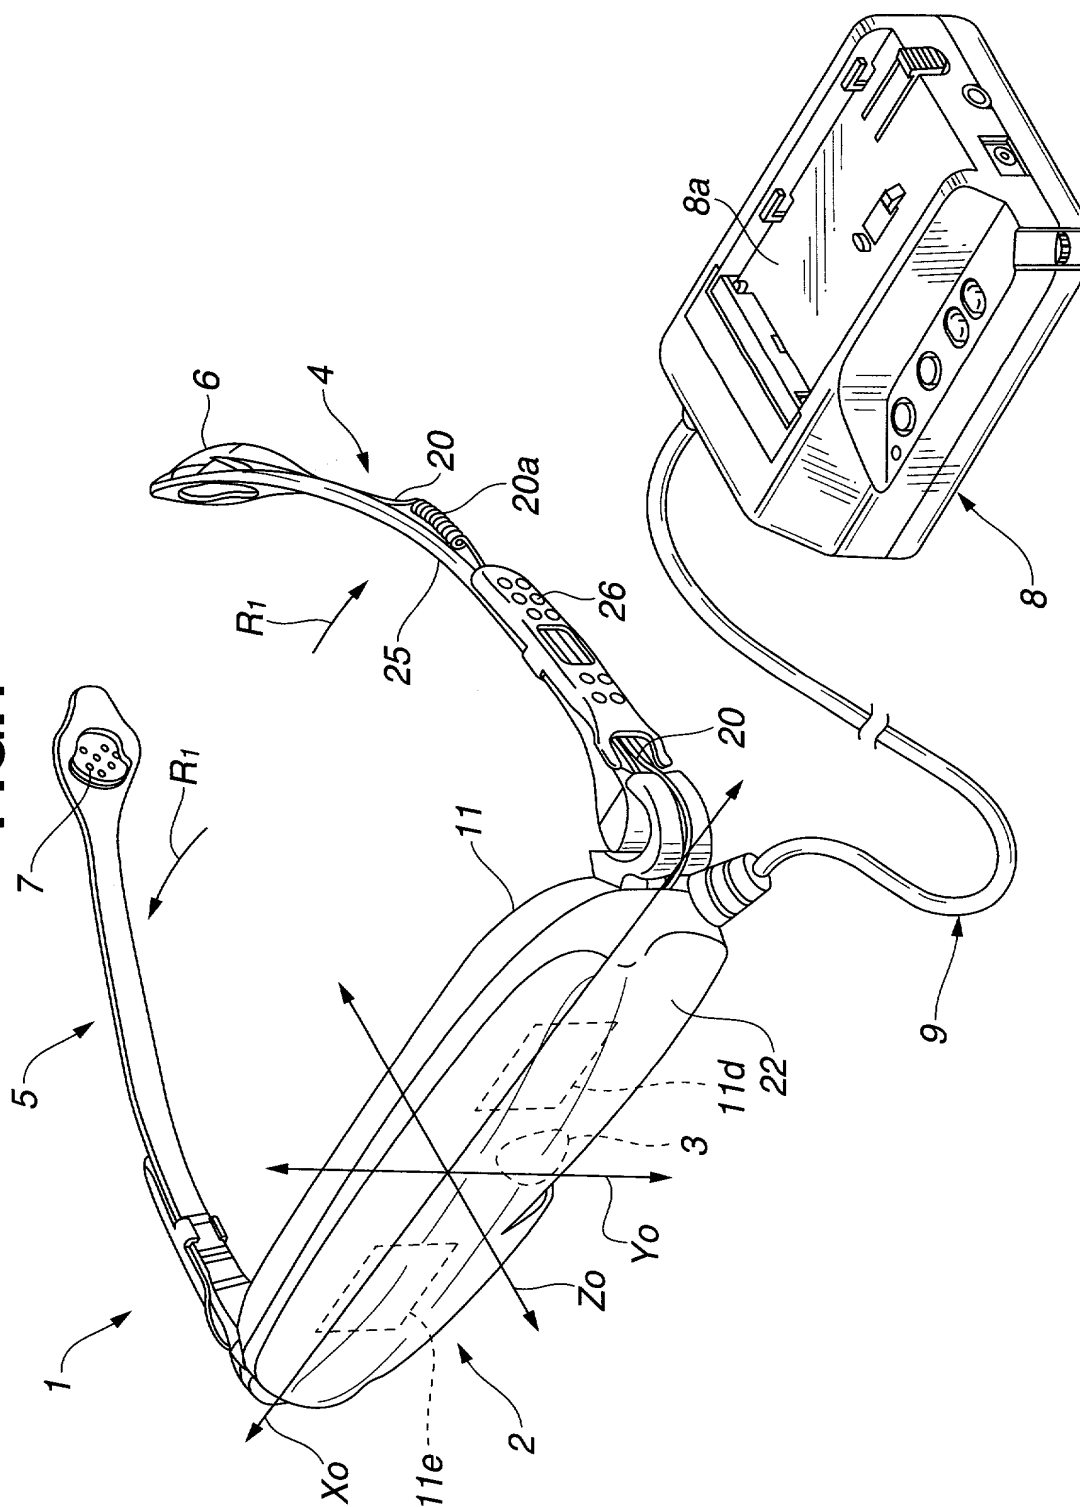


FIG.2

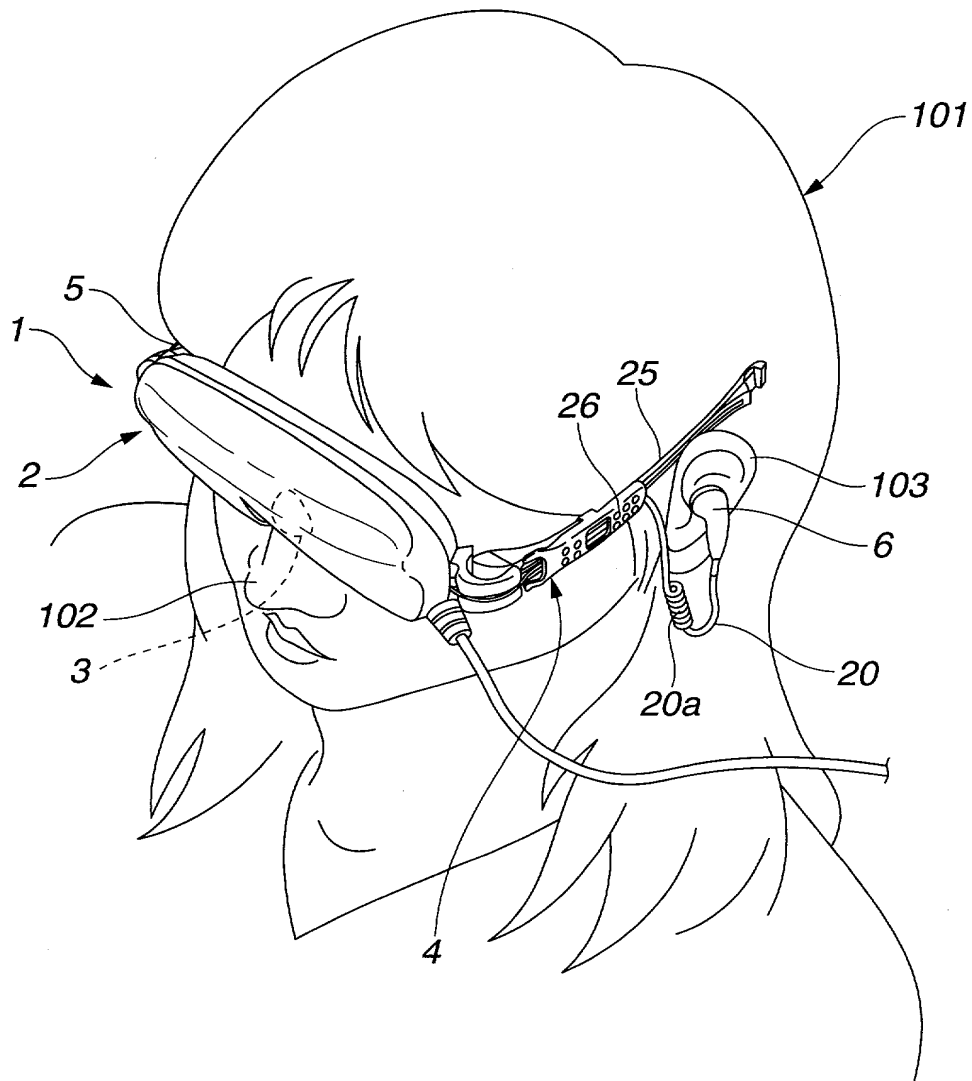
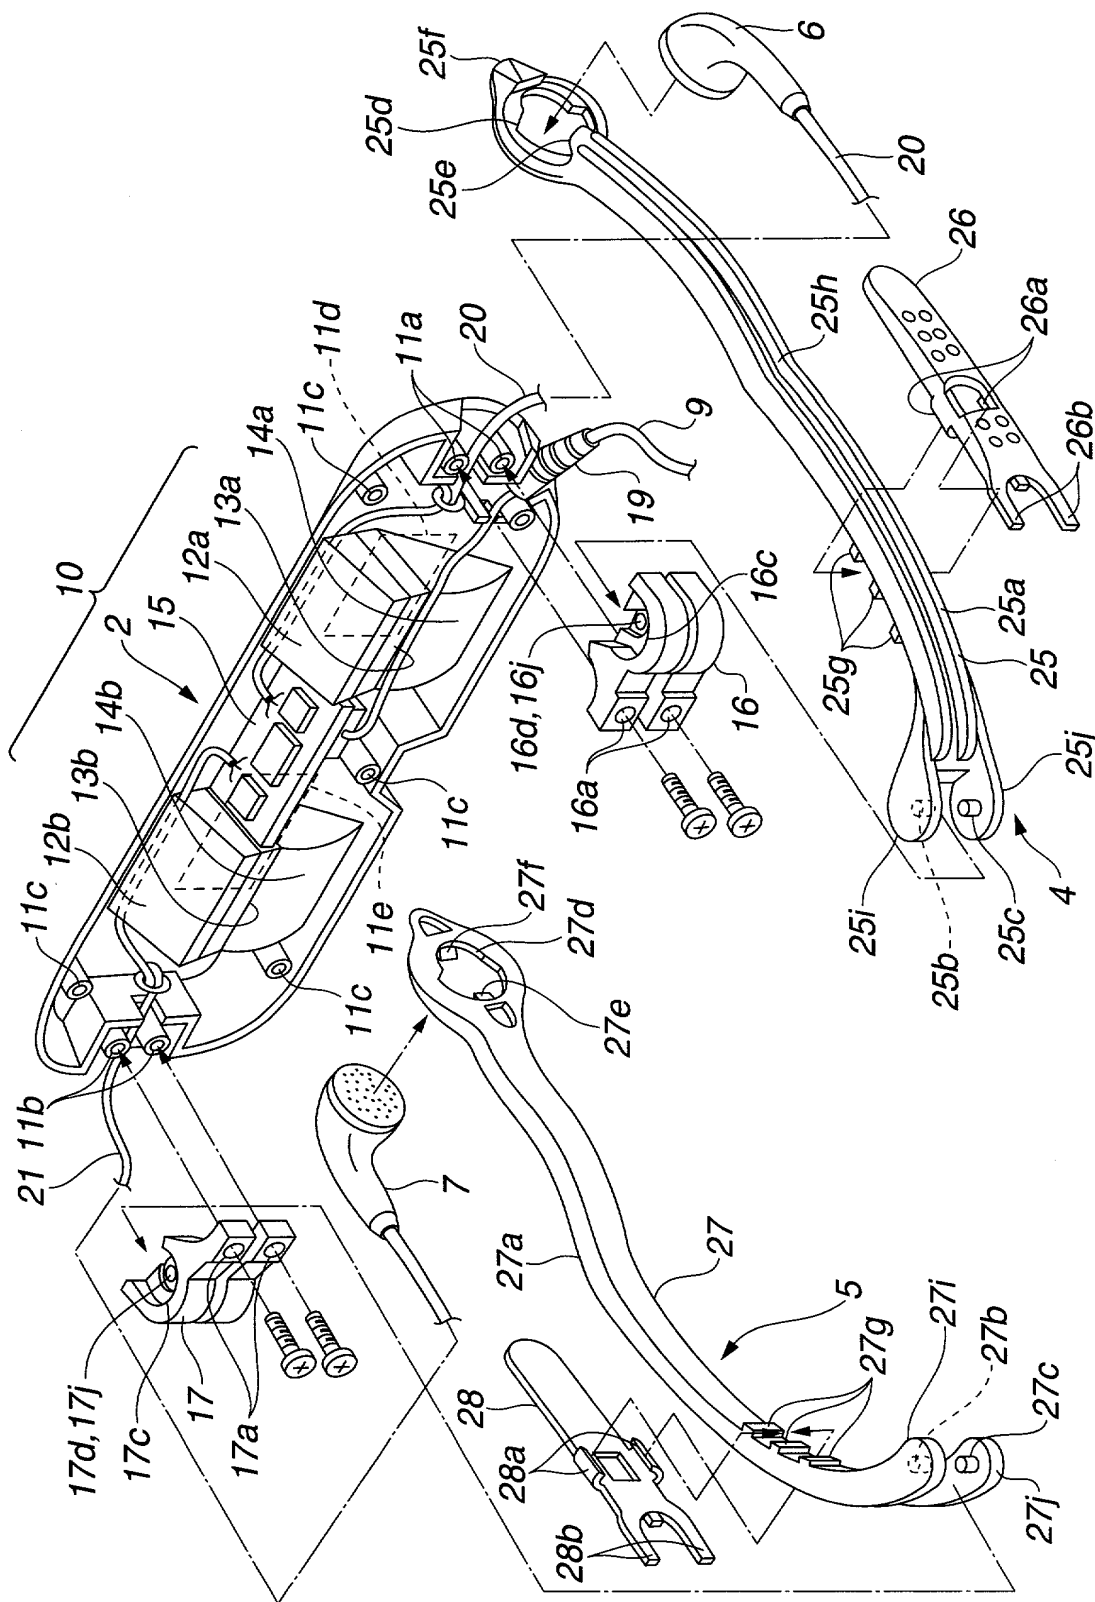


FIG.3



4/13

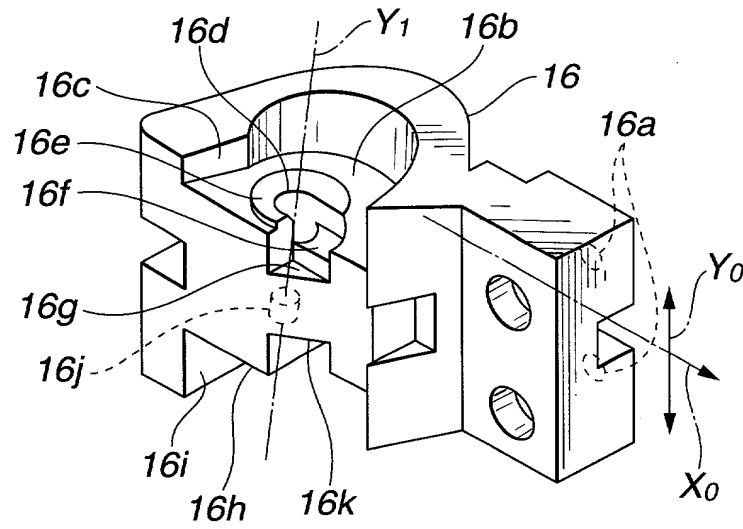
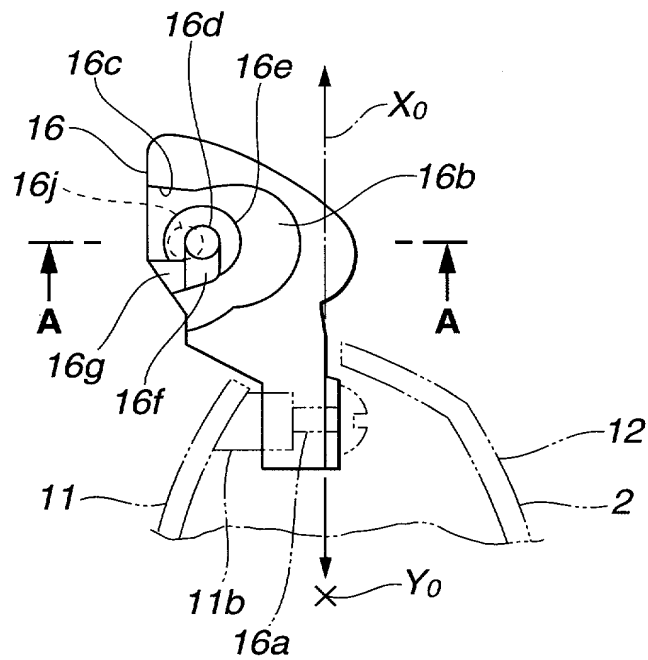
FIG.4**FIG.5**

FIG.6

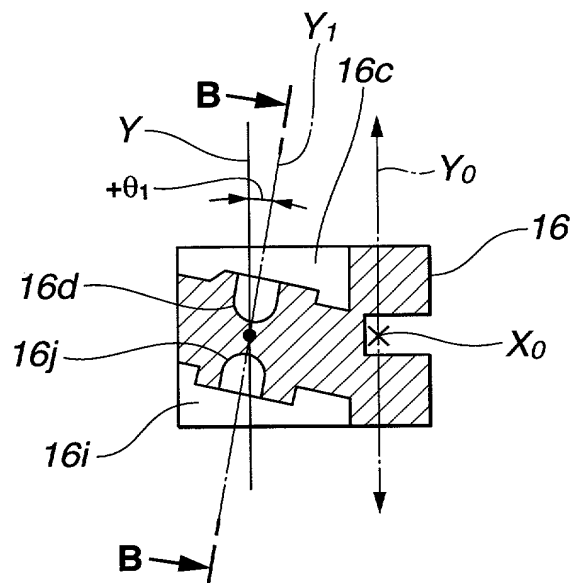


FIG.7

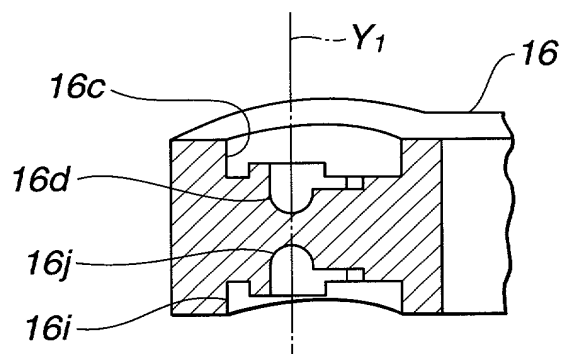


FIG.8

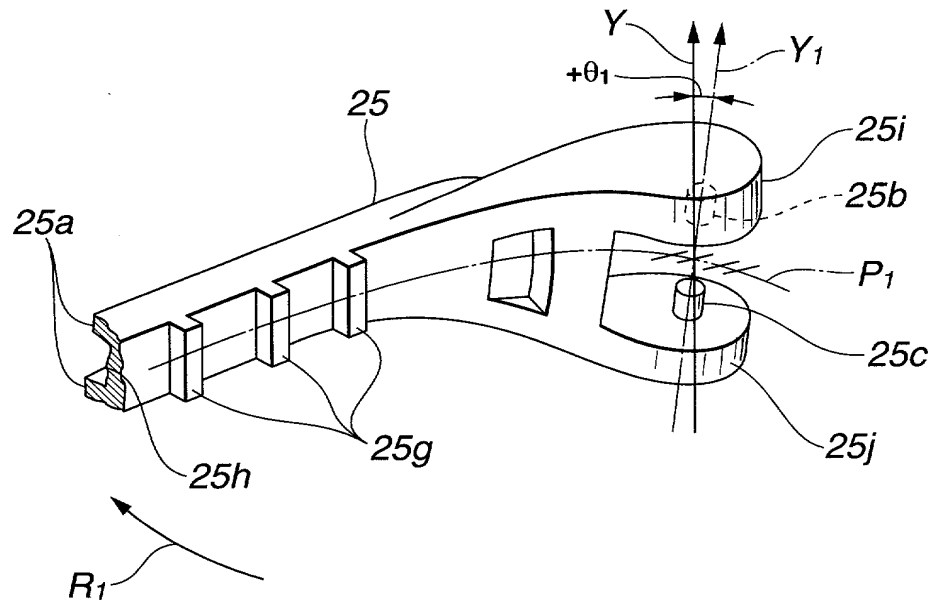


FIG.9

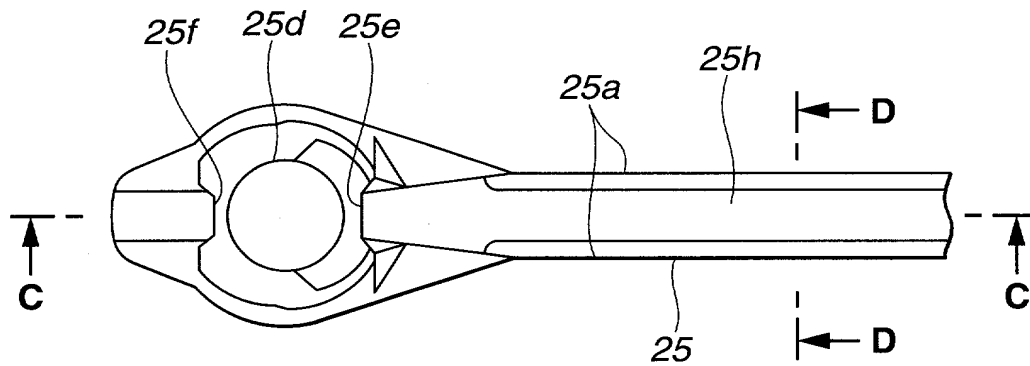


FIG.10

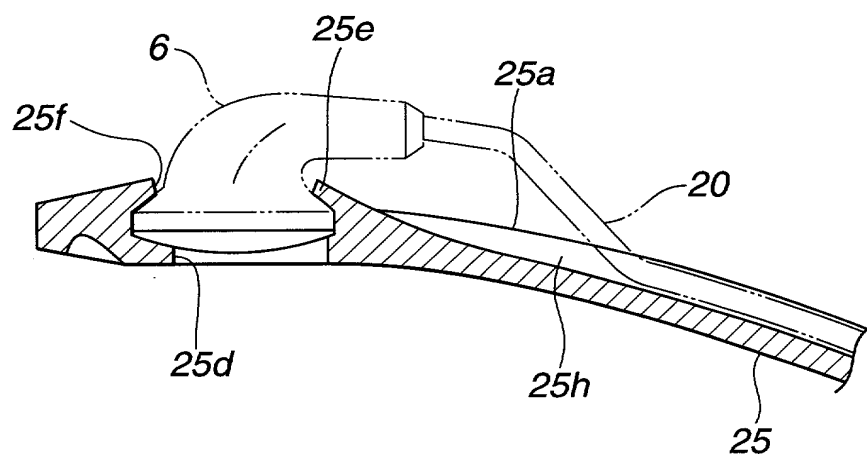


FIG.11

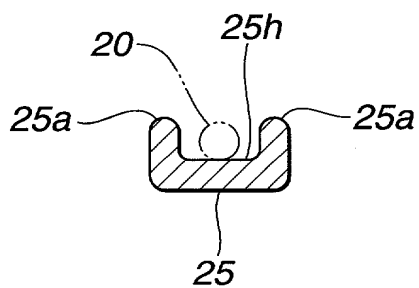


FIG.12A

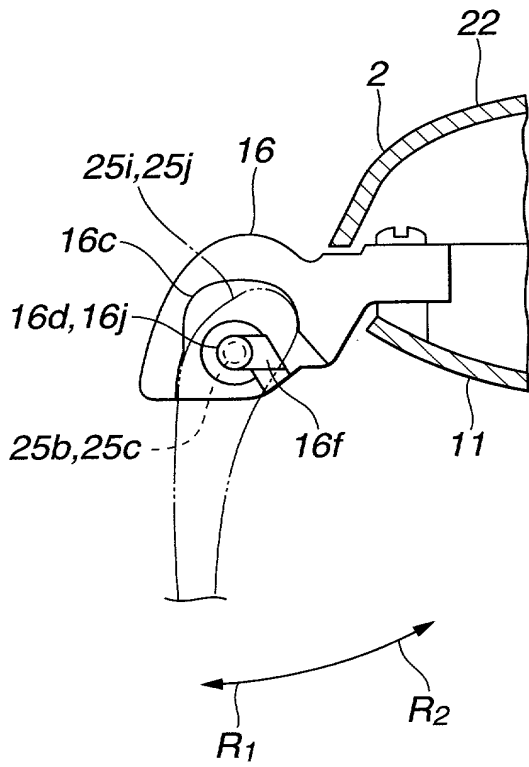


FIG.12B

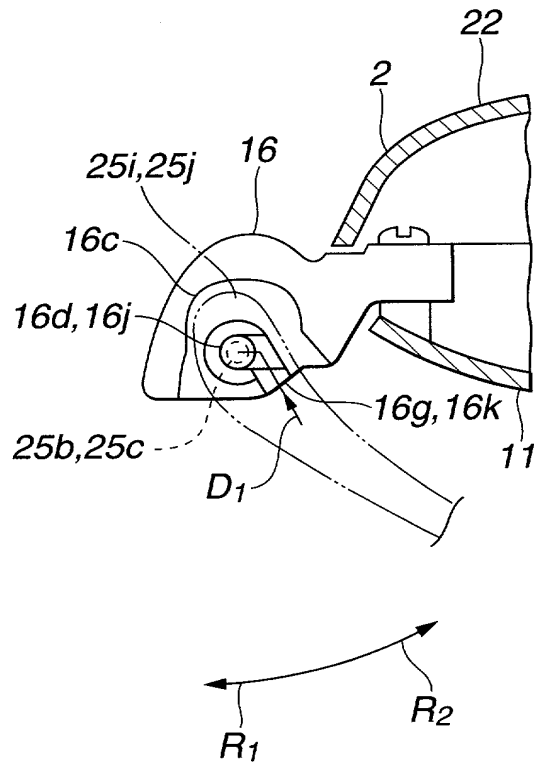


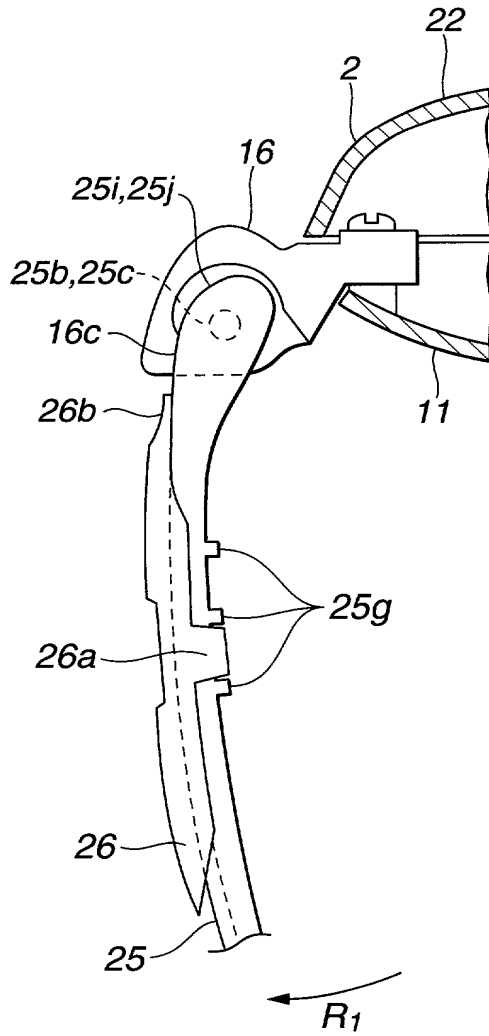
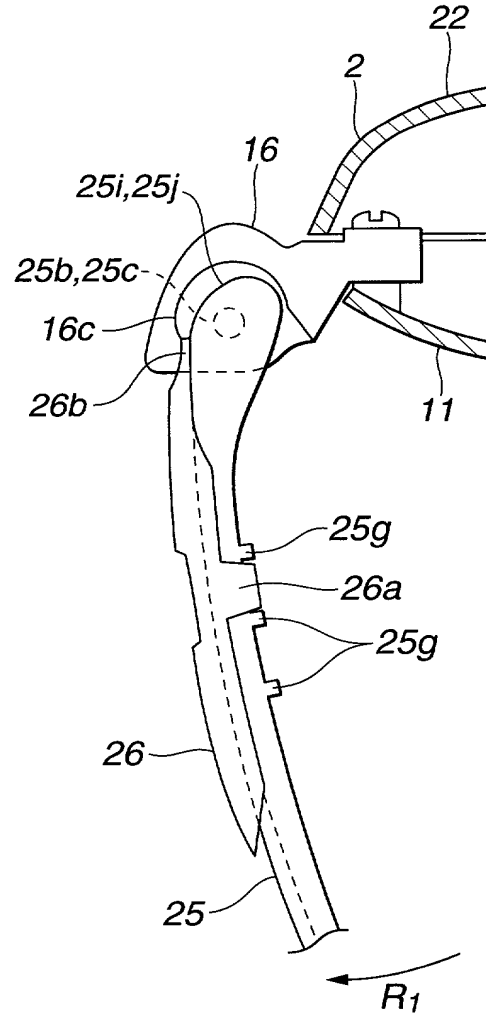
FIG.13A**FIG.13B**

FIG.14

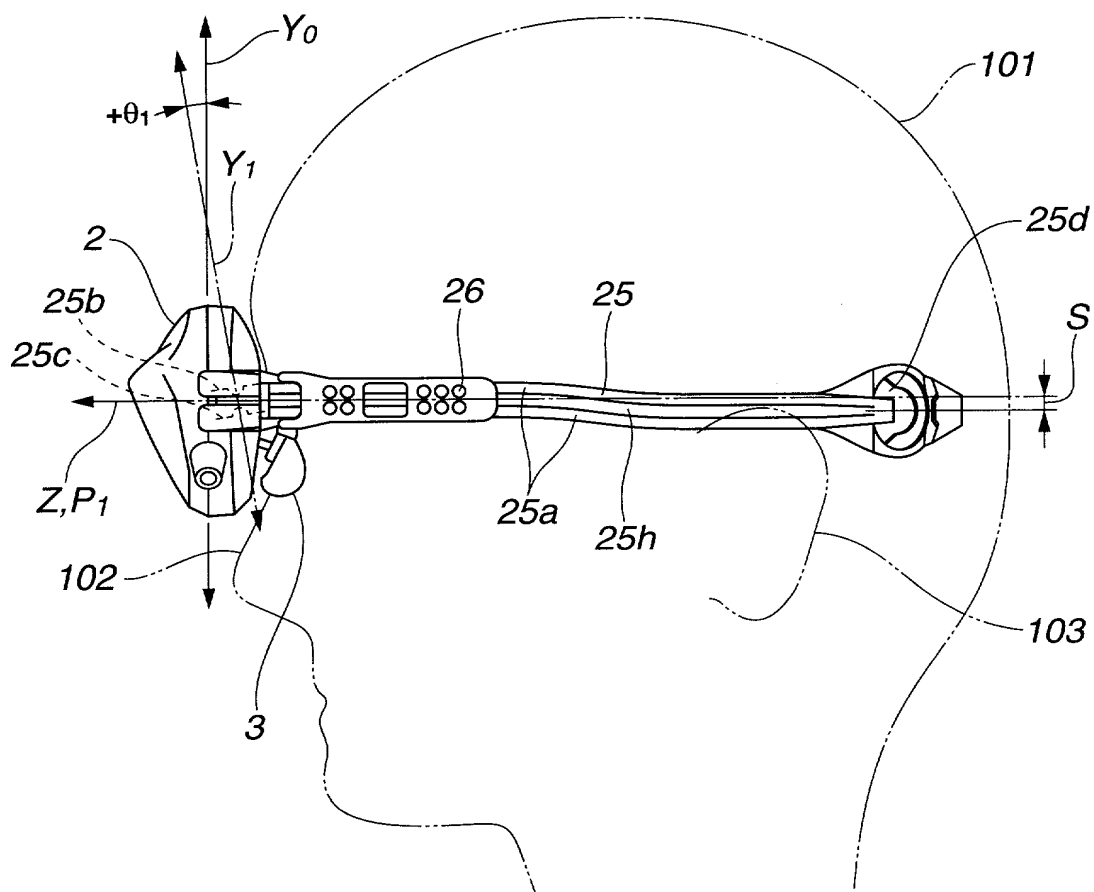
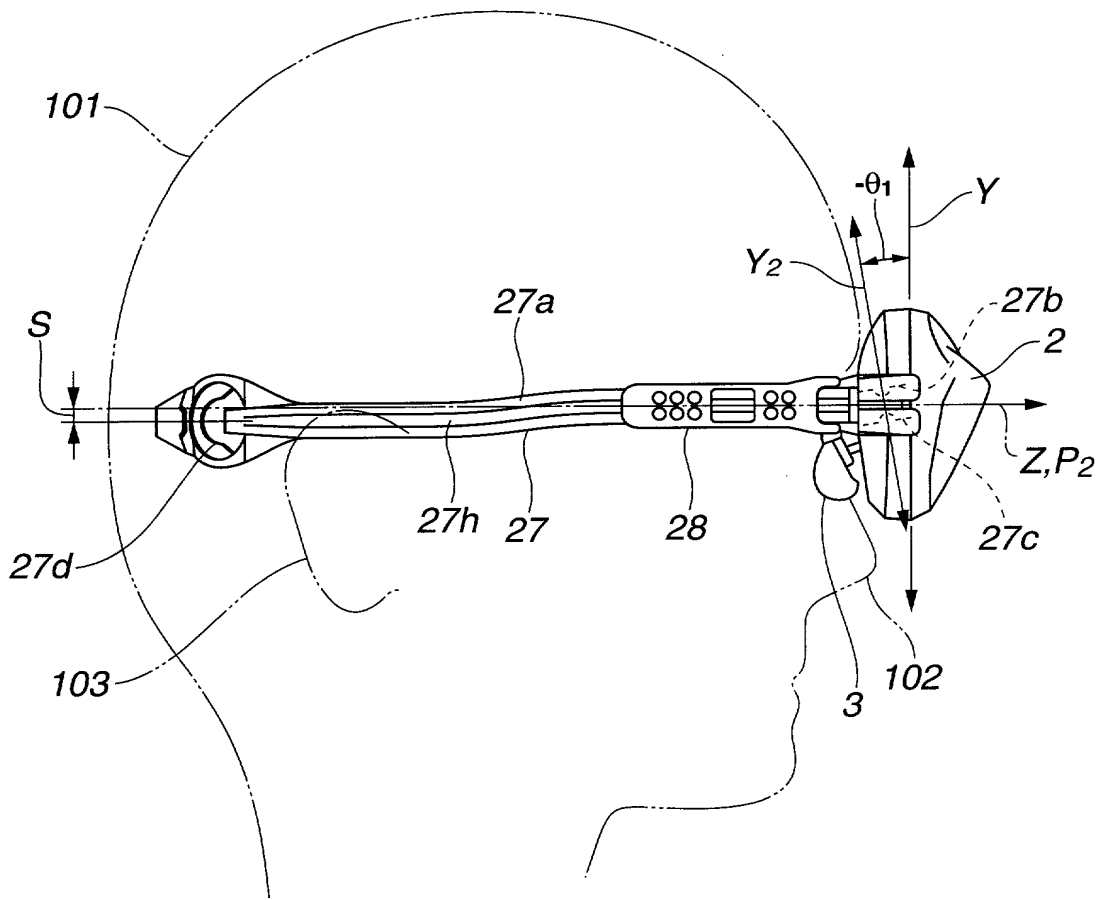


FIG.15



12/13

FIG.16

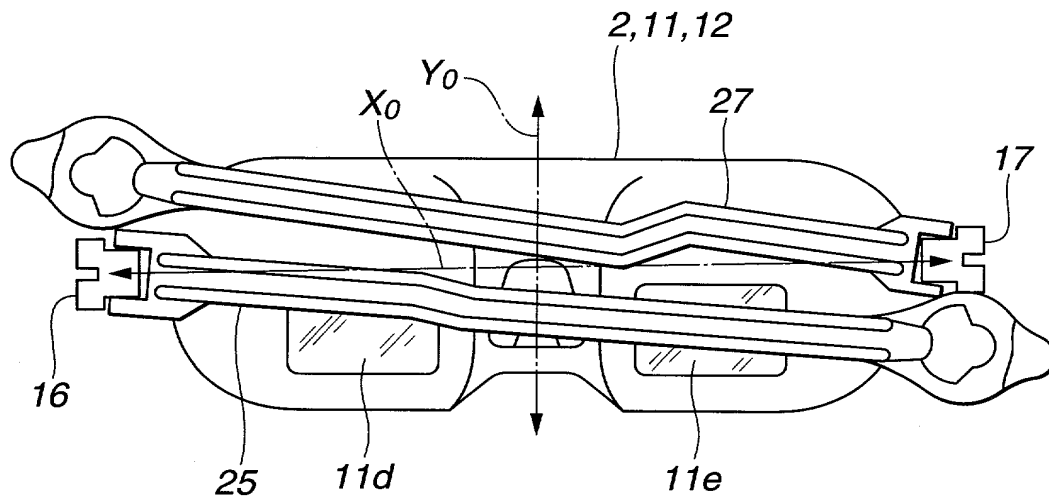
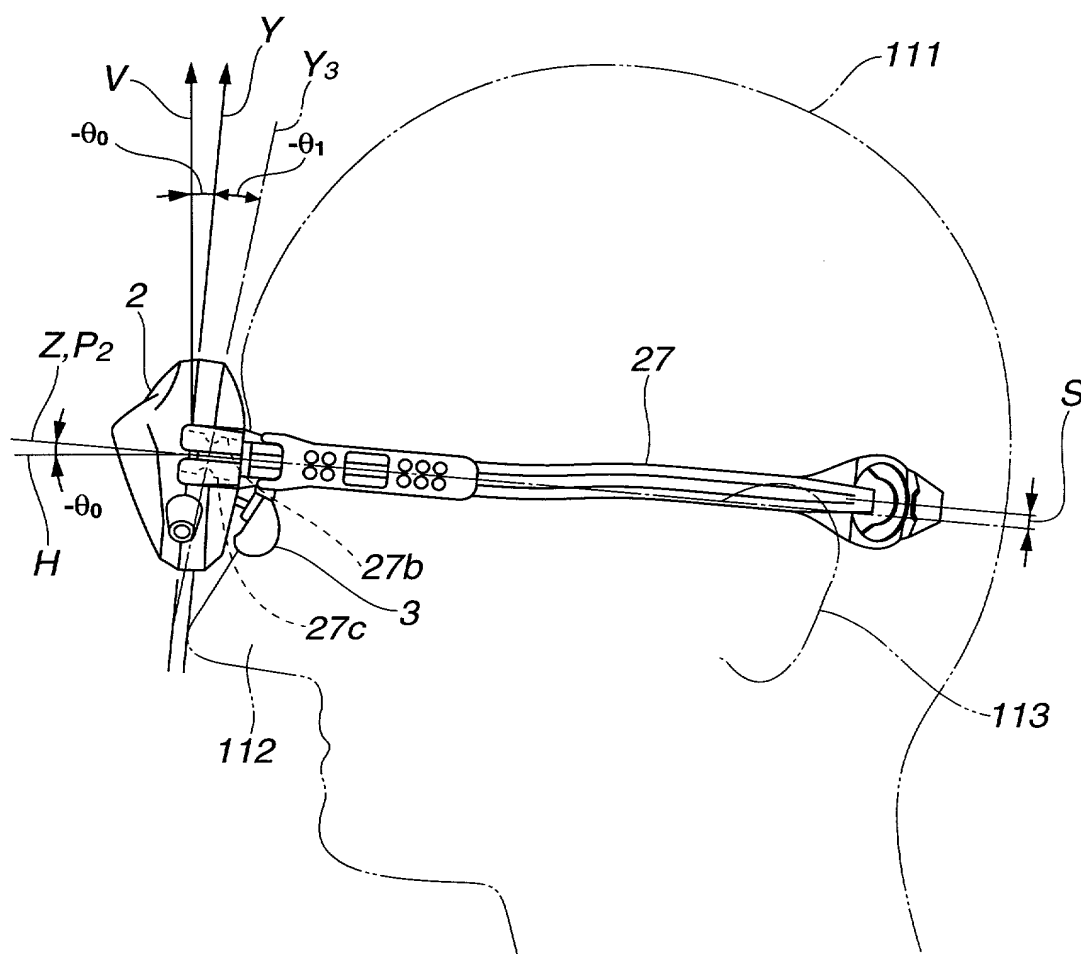


FIG.17



Declaration and Power of Attorney for Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

私は、以下に記名された発明者として、ここに下記の通り宣言する：

As a below named inventor, I hereby declare that:

私の住所、郵便の宛先そして国籍は、私の氏名の後に記載された通りである。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明について、特許請求範囲に記載され、且つ特許が求められている発明主題に関して、私は、最初、最先且つ唯一の発明者である（唯一の氏名が記載されている場合）か、或いは最初、最先且つ共同発明者である（複数の氏名が記載されている場合）と信じている。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

HEAD-MOUNTED DISPLAY DEVICE

上記発明の明細書はここに添付されているが、下記の欄がチェックされている場合は、この限りでない：

the specification of which is attached hereto unless the following box is checked:

☐ _____ の日に出版され、
この出版の米国出版番号またはPCT国際出版番号は、
_____ であり、且つ
_____ の日に補正された出版（該当する場合）

☒ was filed on August 14, 2000
as United States Application Number or
PCT International Application Number
PCT/JP00/05437 and was amended on
_____ (if applicable).

私は、上記の補正書によって補正された、特許請求範囲を含む上記明細書を検討し、且つ内容を理解していることをここに表明する。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編規則1.56に定義されている、特許性について重要な情報を開示する義務があることを認める。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the need of the individual case. Any comments on the amount of time you are required to complete this form should be sent to Chief Information Officer, U.S. Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231.

Japanese Language Declaration (日本語宣言書)

私は、ここに、以下に記載した外国での特許出願または発明者証の出願、或いは米国以外の少なくとも一國を指定している米国法典第35編第365条(a)によるPCT国際出願について、同第119条(a)-(d)項又は第365条(b)項に基づいて優先権を主張するとともに、優先権を主張する本出願の出願日より前の出願日を有する外国での特許出願または発明者証の出願、或いはPCT国際出願については、いかなる出願も、下記の枠内をチェックすることにより示した。

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application for which priority is claimed.

Prior Foreign Application(s)

外国での先行出願

Priority Not Claimed

優先権主張なし

H11-240062

JAPAN

26/8/1999

(Number)
(番号)(Country)
(国名)(Day/Month/Year Filed)
(出願日/月/年)(Number)
(番号)(Country)
(国名)(Day/Month/Year Filed)
(出願日/月/年)

私は、ここに、下記のいかなる米国仮特許出願についても、その米国法典第35編第119条(e)項の利益を主張する。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)(Filing Date)
(出願日)(Application No.)
(出願番号)(Filing Date)
(出願日)

私は、ここに、下記のいかなる米国出願についても、その米国法典第35編第120条に基づく利益を主張し、又米国を指定するいかなるPCT国際出願についても、その同第365条(c)に基づく利益を主張する。また、本出願の各特許請求の範囲の主題が、米国法典第35編第112条第1段に規定された態様で、先行する米国出願又はPCT国際出願に開示されていない場合においては、その先行出願の出願日と本国内出願日またはPCT国際出願日との間の期間中に入手された情報で、連邦規則法典第37編規則1.56に定義された特許性に関わる重要な情報について開示義務があることを承認する。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Application No.)
(出願番号)(Filing Date)
(出願日)(Status: Patented, Pending, Abandoned)
(現況: 特許許可、係属中、放棄)(Application No.)
(出願番号)(Filing Date)
(出願日)(Status: Patented, Pending, Abandoned)
(現況: 特許許可、係属中、放棄)

私は、ここに表明された私自身の知識に係わる陳述が真実であり、且つ情報と信ずることに基づく陳述が、真実であると信じられることを宣言し、さらに、故意に虚偽の陳述などを行った場合は、米国法典第18編第1001条に基づき、罰金または拘禁、若しくはその両方により処罰され、またそのような故意による虚偽の陳述は、本出願またはそれに対して発行されるいかなる特許も、その有効性に問題が生ずることを理解した上で陳述が行われたことを、ここに宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration

(日本語宣言書)

委任状: 私は本出願を審査する手続を行い、且つ米国特許商標庁との全ての業務を遂行するために、記名された発明者として、下記の弁護士及び/または弁理士を任命する。(氏名及び登録番号を記載すること)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number).

書類送付先

William H. Bollman, Reg. 36,457
Edward J. Stemberger, Reg. 36,017
Jeffrey S. Melcher, Reg. 35,950
W. Warren Taltavul, Reg. 25,647
Leon R. Turkevich, Reg. 34,035
Paul E. White, Jr. Reg. 32,011

Send Correspondence to:

William H. Bollman, Esq.
MANELLI DENISON & SELTER PLLC
2000 M Street, N.W., Suite 700
Washington, DC 20036-3307

直通電話連絡先: (氏名及び電話番号)

Direct Telephone Calls to: (name and telephone number)

William H. Bollman, Esq.
(202) 261-1020
(202) 887-0336 (FAX)

唯一または第一発明者氏名		Full name of sole or first inventor	
100 発明者の署名		Yuji OGASAWARA	
日付	Inventor's signature	Date	
	Yuji Ogasawara	Oct. 18, 2001	
住所		Residence	
		Hachioji-shi, Tokyo, Japan JPX	
国籍		Citizenship	
		Japan	
郵便の宛先		Post Office Address	
		c/o Intellectual Property Department	
		Olympus Optical Co., Ltd.	
		2-3, Kuboyama-cho, Hachioji-shi, Tokyo, Japan	
第二共同発明者がいる場合、その氏名		Full name of second joint inventor, if any	
200 第二共同発明者の署名		Etsuyasu KONDO	
日付	Second inventor's signature	Date	
	Etsuyasu Kondo	Oct. 15, 2001	
住所		Residence	
		Hino-shi, Tokyo, Japan JPX	
国籍		Citizenship	
		Japan	
郵便の宛先		Post Office Address	
		c/o Intellectual Property Department	
		Olympus Optical Co., Ltd.	
		2-3, Kuboyama-cho, Hachioji-shi, Tokyo, Japan	

(第三以下の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)